



User's Guide

OD9 OVERDRIVE

SD9 SONIC DISTORTION

OD9Pro+ OVERDRIVE

CP9Pro+ COMPRESSOR/LIMITER

PT9Pro+ PHASER

◆SEFETY PRECAUTIONS◆

Be sure to read these precautions before using this product in order to insure safe operation of the equipment.

Keep this User's Guide on hand for future reference whenever you may need it.

◆安全上のご注意◆


機器を安全にご使用いただくため、ご使用前にこの取扱説明書を必ずお読みください。


そのあとは大切に保管し、必要になったときにお読みください。

SAFETY PRECAUTIONS

Please be sure to observe. The safety precautions listed below are intended to ensure your safety whenever you use the equipment.



■ Precaution text is generally accompanied by the following symbols to alert you and others to the risk of personal and material injury that may be caused if the precaution is ignored.



 **Warning** This symbol indicates an item that can result in death or serious personal injury if ignored.

 **Caution** This symbol indicates an item that can result in serious personal injury or material damage if ignored.

■ Precaution text is generally accompanied by the following icons to alert you and others to things you should or should not do.

 ...A triangle indicates something you should be careful about.

  ...A circle with a line through it indicates something you should not do.

  ...A black circle indicates something you must do.

Warning



NEVER OPEN THE CASE

•Never try to remove the bottom cover and to modify the equipment. (Internal components of the equipment use high voltages, and exposing them creates the danger of fire and electrical shock.)



STOP THE USE IN CASE OF A PROBLEM

•Stop using the equipment whenever you notice smoke or a strange odor coming from it.
•Contact your original dealer or nearest authorized service provider for service.





Warning



BEWARE OF HEAT BUILT UP

- Never cover AC adaptor with cloth or other objects.
(Built up heat creates the danger of the equipment deformation and fire.)



Caution



USE SPECIFIED AC ADAPTOR ONLY

- Be sure to use only the AC adaptor specified in this User's Guide. Use of non-specified AC adaptors creates the danger of fire and electrical shock.



UNPLUGGING AC ADAPTOR

- Never try to unplug AC adaptor while your hands are wet. Doing so creates the danger of electrical shock.
- When unplugging AC adaptor from the power source, be sure to grasp the adaptor. Never pull on the cord. Doing so can damage the power cord and create the danger of fire and electrical shock.



WATER, HUMIDITY, DUST AND HIGH TEMPERATURES

- Never leave or use the equipment in bathrooms, the outdoors or other areas subject to water, high humidity, dust and high temperature. Doing so creates the danger of fire and electrical shock.



LEAVING THE EQUIPMENT UNATTENDED

- Whenever leaving the equipment unattended for long periods, be sure to unplug AC adaptor from the power source. If not, there is a danger of fire.

OD9 Overdrive

- Identical to the original circuit and featuring the JRC4558 IC chip, the OD9 produces natural overdrive of a tube amp that smoothly responds to input signal level (playing dynamics).
- Easy-access, no tools battery compartment.
- AC jack to connect optional AC adaptor for long hours of continuous use.

FEATURES AND CONTROLS

① IN (input jack)

Input jack to connect to the output of guitar, other effects or related equipment. The product automatically turns on when a plug is inserted into this jack. When not in use, disconnect plug from input jack to preserve battery life.


* When an external AC adaptor supplies DC power to this product, the power is always on and battery is preserved regardless of input jack connection.

② OUT (output jack)

Output jack to connect to input of amplifier or other effects.

③ DRIVE

This controls overdrive level. Turn it clockwise for more overdrive.

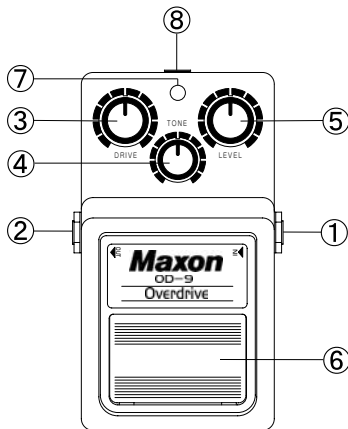

- True Bypass Switching lets your instrument's signal pass through a non-electronic bypass line when the effect is disengaged, feeding your amp with direct, unaltered signal from your instrument.
Low noise mechanical switch is used for effect/normal switching.
- LED to indicate effect/bypass and battery condition for trouble-free performance.

④ TONE

This controls the amount of high frequencies. Turn it clockwise for more treble and counterclockwise for less treble.

⑤ LEVEL

This controls output level of effected signal. Typically output levels of both normal signal and effected signal should be adjusted to equal levels.

⑥ FOOTSWITCH

Switch for effect on/off. Stepping on this switch alternately turns effects on and off.

*Effect turns on when you depress the switch and effect turns off when you depress and release the switch.

⑦ LED INDICATOR

This indicates the effect/bypass status and battery condition. It lights when plug is inserted to input jack and effect is on. No LED light indicates the battery is low or not installed. In this case replace the battery.

⑧ DC IN (power input jack)


A jack for connection of external power supply to effect. Be sure to use the correct Maxon AC adaptor.




Turn down amplifier's volume to the minimum before connecting AC adaptor to the product in order not to damage other connected equipment.

SAMPLE SETTING


Please visit www.maxon.co.jp to listen to audio samples.




No.1 (for humbucker with clean amp)
This makes clean sound into OD-9's characteristic tube drive sound.



No.3 (for humbucker/single coil with dirty amp)
This setting makes compact amp's drive sound more powerful like stack amp sound. Recommended for lead guitar, too.




No.2 (for humbucker with crunch amp)
OD-9 adds power and sustain to your crunch amp.



No.4 (for single coil with clean/crunch amp)
Gain booster that maintains your original picking nuance and dynamics.

CONNECTION DIAGRAM

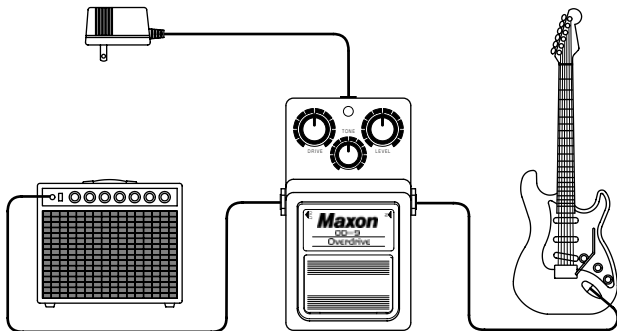

SPECIFICATIONS

Input Impedance	: 500k ohms
Output Impedance	: 10k ohms or less
Maximum Gain	: 40dB (at 1.5kHz)
Equivalent Input Noise	: -114dB or less (input shorted IHF-A weighted)
Controls	: DRIVE, TONE, LEVEL
Switch	: EFECT / True BYPASS
Power Supply	: 9V battery (6F22 or 6LR61) x 1 or Maxon AC adaptor
Battery life	: manganese dry battery more than 76hours 25deg C / 77deg F (Panasonic 6F22NB)
Power Consumption	: 6mA / 9V 7mA / 10V
Dimensions	: 124(D) x 74(W) x 54(H) mm
Weight	: 580g (including battery)
Options	: Maxon AC adaptor (9-10VDC)

* Specifications are subject to change without notice.

SD9 Sonic Distortion

- Bright distortion with precise picking response over the entire frequency range. Sweet harmonics accentuate high-end tones.
- Easy-access, no tools battery compartment.
- A jack to connect optional AC adaptor for long hours of continuous use.

FEATURES AND CONTROLS

① IN (input jack)

Input jack to connect to the output of guitar, other effects or related equipment. The product automatically turns on when a plug is inserted into this jack. When not in use, disconnect plug from input jack to preserve battery life.


* When an external AC adaptor supplies DC power to this product, the power is always on and battery is preserved regardless of input jack connection.

② OUT (output jack)

Output jack to connect to input of amplifier or other effects.

③ DISTORTION

This controls distortion level. Turn it clockwise for more distortion.

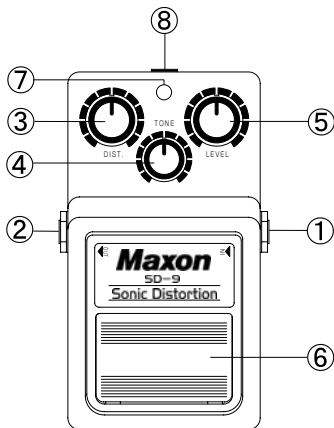

- True Bypass Switching lets your instrument's signal pass through a non-electronic bypass line when the effect is disengaged, feeding your amp with direct, unaltered signal from your instrument.
Low noise mechanical switch is used for effect/normal switching.
- LED to indicate effect/bypass and battery condition for trouble-free performance.

④ TONE

This controls the amount of high frequencies. Turn it clockwise for more treble and counterclockwise for less treble.

⑤ LEVEL

This controls output level of effected signal. Typically output levels of both normal signal and effected signal should be adjusted to equal levels.

⑥ FOOTSWITCH

Switch for effect on/off. Stepping on this switch alternately turns effects on and off.

* Effect turns on when you depress the switch and effect turns off when you depress and release the switch.

⑦ LED INDICATOR

This indicates the effect/bypass status and battery condition. It lights when plug is inserted to input jack and effect is on. No LED light indicates the battery is low or not installed. In this case replace the battery.

⑧ DC IN (power input jack)


A jack for connection of external power supply to effect. Be sure to use the correct Maxon AC adaptor.




Turn down amplifier's volume to the minimum before connecting AC adaptor to the product in order not to damage other connected equipment.

SAMPLE SETTING


Please visit www.maxon.co.jp to listen to audio samples.




No.1 (for humbucker with clean amp)
Smooth and powerful drive sound featuring SD-9's characteristic "fat" distortion.



No.3 (for humbucker with clean amp)
Light fuzz sound made by boosting high frequencies and rear pickup tone.




No.2 (for single coil with crunch amp)
Distortion level is set low for overdrive taste. Recommended when amp's tonal character is important.



No.4 (for humbucker with drive amp)
SD-9 effects are added to amp that is set with little mid-range, to make heavy distortion sound.

CONNECTION DIAGRAM

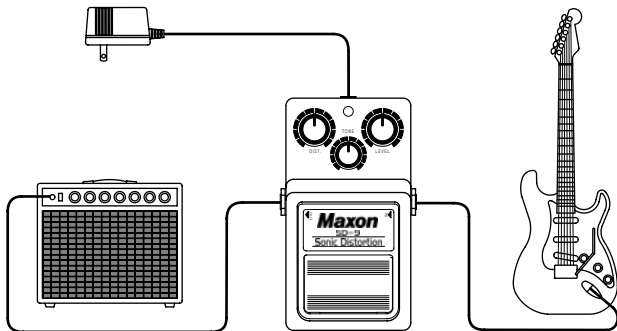

SPECIFICATIONS

Input Impedance	: 500k ohms
Output Impedance	: 10k ohms or less
Maximum Gain	: 42dB (at 2.0kHz)
Equivalent Input Noise	: -115dB or less (input shorted IHF-A weighted)
Controls	: DIST, TONE, LEVEL
Switch	: EFECT / True BYPASS
Power Supply	: 9V battery (6F22 or 6LR61) x 1 or Maxon AC adaptor
Battery life	: manganese dry battery more than 76hours 25deg C / 77deg F (Panasonic 6F22NB)
Power Consumption	: 6mA / 9V 7mA / 10V
Dimensions	: 124(D) x 74(W) x 54(H) mm
Weight	: 580g (including battery)
Options	: Maxon AC adaptor (9-10VDC)

* Specifications are subject to change without notice.

OD9Pro+ Overdrive

- An evolved version of the OD9. In BOOST mode, newly added mode switch (BOOST/NORMAL) provides smooth and pure tube sound by reducing high and low ranges and boosting mid-range. In NORMAL mode, OD9Pro+ enhances the OD9's fat and natural scream sound.
- OD9Pro+ uses a stabilized DC-DC voltage converter to bump 9 volts (plus and minus 4.5 volts) up to 18 volts (plus and minus 9 volts). Operating voltage is switchable via an internal DIP switch accessible through the unit's battery compart-

FEATURES AND CONTROLS

① IN (input jack)

Input jack to connect to the output of guitar, other effects or related equipment. The product automatically turns on when a plug is inserted into this jack. When not in use, disconnect plug from input jack to preserve battery life.

- * When an external AC adaptor supplies DC power to this product, the power is always on and battery is preserved regardless of input jack connection.

② OUT (output jack)




Output jack to connect to input of amplifier or other effects.

③ DRIVE

This controls overdrive level. Turn it clockwise for more overdrive and counter-clockwise for smooth natural clean sound.

④ TONE

This controls the amount of high frequencies. Turn it clockwise for more treble and counter-clockwise for less treble.



ment. OD9Pro+ can also be used at 9 volts (plus and minus 4.5 volts). Stable sound is constantly available regardless of selected voltage.

- True Bypass Switching using 4PDT switch lets your instrument's signal pass through a non-electronic bypass line when the effect is disengaged, feeding your amp with direct, unaltered signal from your instrument.
- Easy-access, no tools battery compartment.

⑤ LEVEL

This controls output level of effected signal. Typically output levels of both normal signal and effected signal should be adjusted to equal levels.

⑥ BOOST/NORMAL

Switch for BOOST/NORMAL. In BOOST mode, it provides tube sound in which mid-range is boosted by 3 dB.

In NORMAL mode, classical tube sound is available.

⑦ FOOTSWITCH

Switch for effect/bypass. Stepping on this switch alternately turns effects on and off.

- * Effect turns on when you depress the switch and effect turns off when you depress and release the switch.

⑧ LED INDICATOR

This indicates the effect/bypass status and battery condition. It lights when plug is inserted to input jack and effect is on. No LED light indicates the battery is low

or not installed. In this case replace the battery.


⑨ DC IN (power input jack)

Jack for connection of external power supply to effect. Be sure to use the correct Maxon AC adaptor. For further information on AC adaptor, refer to page 26.

Turn down amplifier's volume to the minimum before connecting AC adaptor or DC plug.

⑩ OPERATING VOLTAGE SWITCH

Slide it to left side for 18V ($\pm 9V$) and right side for 9V ($\pm 4.5V$).


 Turn down amplifier's volume to the minimum before sliding this switch.

⑪ INTERNAL LED INDICATOR

This indicates the status of operating voltage. It lights at 9V ($\pm 4.5V$). No LED light indicates the operating voltage is 18V ($\pm 9V$).

SAMPLE SETTING

Please visit www.maxon.co.jp to listen to audio samples




No.1 Clean Tube

Amp Clean

PU: Single

OD9Pro+ NORMAL mode

Provides warm tone of tube combo amp.




No.3 Classic Drive

Amp Crunch

PU: Hum

OD9Pro+ NORMAL mode

Creates smooth and lustrous mid-range, which is reminiscent of 70's hard rock.




No.2 Bluesy Boost

Amp Crunch

PU: Single

OD9Pro+ NORMAL mode

Boost type overdrive sound, which is unique characteristic for OD9Pro+. Provides a strong lead sound while retaining your instrument's original low-end response.



No.4 Fat Drive


Amp Drive

PU: Hum

OD9Pro+ BOOST mode

Provides smooth, solid and powerful boost sound with deep fat overdrive.

CONNECTION DIAGRAM

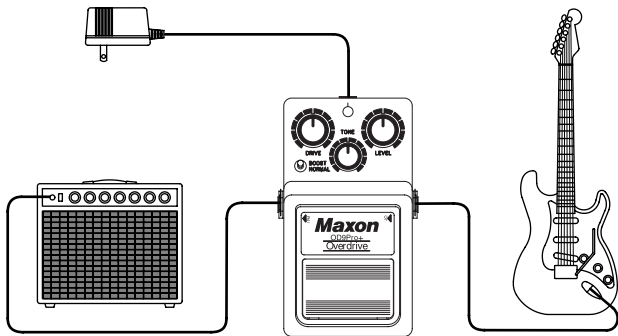

SPECIFICATIONS

Input Impedance	:500k ohms
Output Impedance	:10k ohms or less
Maximum Gain	:NORMAL 43dB(1.5kHz) BOOST 46dB(1kHz)
Equivalent Input Noise	:-116 dB or less (IHF-A)
Controls	:DRIVE, TONE, LEVEL
Switches	:BOOST/NORMAL switch 18V ($\pm 9V$) /9V ($\pm 4.5V$) switch
Indicator	:EFFECT LED
Operating Voltage	:18V ($\pm 9V$) / 9V ($\pm 4.5V$)
Power Consumption	:35mA/9V, 32mA/10V at operating voltage 18V ($\pm 9V$) 27mA/9V, 27mA/10V at operating voltage 9V ($\pm 4.5V$)
Dimensions	:124(D) \times 74(W) \times 54(H)mm
Weight	:580g (including battery)
Battery	:9V battery (6LR61 or 6F22) x 1 or Maxon AC adaptor
Battery life	:manganese dry battery approx. 3 hours 25deg C / 77deg F (Panasonic 6F22NB) Alkaline dry battery approx. 8 hours 25deg C / 77deg F (Panasonic 6LR61G)

※ Specifications are subject to change without notice.

CP9Pro+ Compressor/Limiter

- CP9Pro+ by use of high-quality VCA (voltage controlled amplifier) and RMS (root-mean-square) sensor, provides natural attack response with low noise.
- CP9Pro+ uses a DC to DC voltage converter to bump 9V up to 18V. PT9Pro+ provides wide dynamic range and sufficient head room against distortion.
- Compression/Limit level response to picking dynamics is easily viewable with Threshold LED.

FEATURES AND CONTROLS

① IN (input jack)

Input jack to connect to the output of guitar, other effects or related equipment. The product automatically turns on when a plug is inserted into this jack. When not in use, disconnect plug from input jack to preserve battery life.

② OUT (output jack)


Output jack to connect to the input of amplifier or other effects.

③ THRESHOLD (threshold level control knob)

Controls threshold level of compression. (Fig. 1) When an input signal is above the THRESHOLD level, compression will be carried out in the manner defined by the setting of the RATIO control. (Fig. 2) Compression starts from a low level when this control is turned clockwise. So turn the output level up by the GAIN control since the output level becomes also low. (Fig. 3)

④ RATIO (ratio control knob)

Controls compression ratio. Turn RATIO control knob clockwise to increase

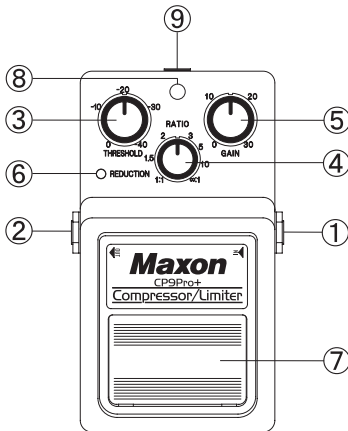

- True Bypass Switching with 4PDT lets your instrument's signal pass through a non-electronic bypass line when the effect is disengaged, feeding your amp with direct, unaltered signal from your instrument.
- Easy-access, no tools battery compartment.

compression from 1:1 (no compression) up to $\infty:1$ (no increase in output level, regardless of input level increases above threshold). When the RATIO is $\infty:1$, it can be used as a limiter. When the RATIO is 1:1, it can be used as a clean booster.

⑤ GAIN (gain control knob)

Controls output level. When strong compression is set by THRESHOLD and RATIO, output level goes down. (Fig. 3) Turn GAIN control knob clockwise to have the same volume as Bypass

functions. Output level can be boosted up to +30dB so that when the RATIO is 1:1, it can be used as a clean booster.

- ⑥ REDUCTION LED (reduction indicator)
The LED lights when output level is compressed more than +3dB vs. input level.

Refer to OD9 pages for ⑦ ⑧ ⑨.

⑦ FOOTSWITCH

⑧ INDICATOR

⑨ DC. IN.

Fig.1 THRESHOLD




Fig.2 RATIO






Fig.3 GAIN




SAMPLE SETTING

Please visit www.maxon.co.jp to listen to audio samples.




No.1 Deep Comp

Provides unique sound of deep compression by turning RATIO control fully clockwise. The nuance of original sound is not spoiled even in deep compression.




No.3 Fingerstyle Bass

Setting for even attack of finger picking. THRESHOLD and GAIN knobs should be adjusted according to output of bass guitar.



No.2 Cutting


Setting to even output of the attack of cutting in clean sound. To get a balance with the attack of original sound, turn the THRESHOLD knob.



No.4 Slap Bass

Setting to compress slap phrase which has a lot of peak levels. Attack level balances with other level with much compression. THRESHOLD and GAIN knobs should be adjusted according to output of bass guitar.

CONNECTION DIAGRAM

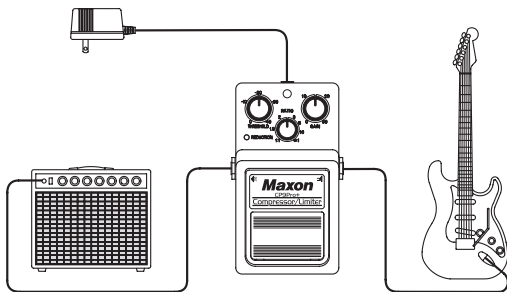

SPECIFICATIONS

Input Impedance	: 500k ohms
Output Impedance	: 10k ohms
Maximum output level	: +18dBu (1kHz)
Control THRESHOLD	: 0dBu to -40dBu
RATIO	: 1:1 to ∞:1
GAIN	: 0dB to +30dB
Distortion ratio	: 0.01% (1kHz) At 0dB output
Residual Noise	: -95dBu (Input shorted, IHF-A weighted)
Indicator	: Effect LED REDUCTION LED When REDUCTION LED lights, compression is more than 3dB.
Internal circuit voltage	: Stabilized ±9V DC to DC Converter
Power Supply	: 6F22 9V manganese dry cell battery x 1 or Maxon AC adaptor
Power Consumption	: 25mA/9V 23mA/10V
Dimensions	: 124(D) x 74(W) x 54(H)
Weight	: 580g (including battery)
Battery life	: Panasonic NEO battery 6F22NB Approx 5.1 hours @ 77deg F / 25deg C Panasonic ALKALINE battery 6LR61G Approx 12.4 hours @ 77deg F / 25deg C

※Specifications are subject to change without notice.

PT9Pro+ Phaser

- PT9Pro+ by use of high-performance light dependent resistor device and ten-stage phasing provides studio quality smooth phase sound with low noise.
- PT9Pro+ uses a stabilized DC-DC voltage converter to bump 9 volts up to plus and minus 9 volts. PT9Pro+ provides wide dynamic range and sufficient head room against distortion.

FEATURES AND CONTROLS

① IN (input jack)

Input jack to connect to the output of guitar, other effects or related equipment. The product automatically turns on when a plug is inserted into this jack. When not in use, disconnect plug from input jack to preserve battery life.

② OUT (output jack)


Output jack to connect to the input of amplifier or other effects.

③ SPEED (speed control knob)

Controls modulation rate. Turn this knob clockwise for faster modulation.

④ FEEDBACK (feedback control knob)

Controls effect level of modulation. Turn this knob clockwise for PT9Pro+'s characteristic effects with unique modulation. The fully clockwise position may cause a self-oscillation, which you can cut off by turning this control counter-

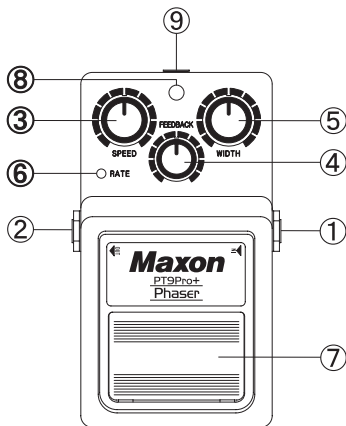

- RATE LED brightness synchronizes with phase shift speed. It makes it easy to see the rate.
- True Bypass Switching using 4PDT switch lets your instrument's signal pass through a non-electronic bypass line when the effect is disengaged, feeding your amp with direct, unaltered signal from your instrument.
- Easy-access, no tools battery compartment.

clockwise.

- ⑤ WIDTH (width control knob)
Controls modulation depth. Turn this knob clockwise for deeper modulation.
- ⑥ RATE (rate indicator)
Indicates phase shift speed rate. LED brightness synchronizes with phase shift speed set by speed control knob.
- ⑦ FOOTSWITCH
Switch for effect on/off. Stepping on this switch alternately turns effect on and off.
* Effect turns on when you depress the switch and effect turns off when you depress and release the switch.
- ⑧ INDICATOR
This indicates the effect/bypass

status and battery condition. It lights when plug is inserted into input jack and effect is on with footswitch. No LED light indicates the battery is low or not installed. In this case replace the battery.


- ⑨ DC IN (power input jack)
Jack for connection of external power supply to effect. Be sure to use the correct Maxon AC adaptor.



Turn down amplifier's volume to the minimum before connecting AC adaptor to the product in order not to damage other connected equipment.


SAMPLE SETTING

Please visit www.maxon.co.jp to listen to audio samples.




No.1 Smooth & Warm

Standard setting with medium speed. Warm tone, i.e. natural and fat studio sound, which is unique characteristic for analog phase and is very impressive.




No.3 Bass

PT9Pro+ goes well with bass. Wide modulation can be added without spoiling your original bass sound. Wide-range effect is controlled by WIDTH.



No.2 Tremolo


This setting provides wide tremolo sound which is a bit different from the one for chorus effect. Modulation character can be controlled by WIDTH.



No.4 FEEDBACK

This setting provides special sound which is distinctive characteristic of PT9Pro+. With FEEDBACK level set to full, this special sound is created by WIDTH and SPEED.

CONNECTION DIAGRAM

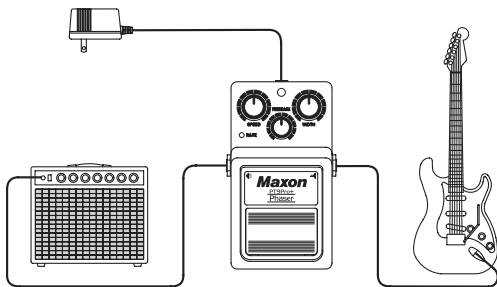

SPECIFICATIONS


Input Impedance	: 500k ohms
Output Impedance	: 10k ohms
Maximum output level	: +18dBu (1kHz)
Control	: SPEED FEEDBACK WIDTH
Speed Frequency	: 0.055 to 8.3Hz (18Sec to 120mSec)
Indicators	: Effect LED RATE LED
Residual Noise	: -95dBu (Input shorted, IHF-A weighted)
Internal circuit voltage	: Stabilized $\pm 9V$ DC-DC Converter
Power Supply	: 6F22 9V manganese dry cell battery x 1 or Maxon AC adaptor
Power Consumption	: 32mA/9VDC 30mA/10VDC
Dimensions	: 124(D) x 74(W) x 54(H)mm
Weight	: 580g (including battery)
Battery life	: Panasonic NEO battery 6F22NB Approx 3.0 hours @ 77deg F / 25deg C Panasonic ALKALINE battery 6LR61G Approx 8.4 hours @ 77deg F / 25deg C

※Specifications are subject to change without notice.

BATTERY REPLACEMENT

BATTERY REPLACEMENT

This product operates on one 9V battery (6F22). Follow the procedures below to replace batteries:

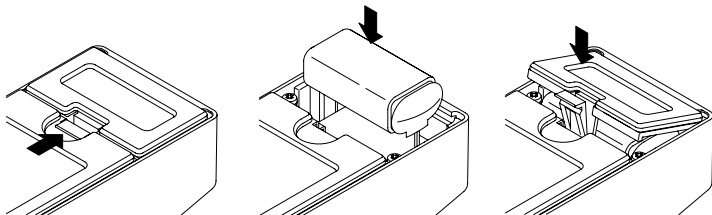

* Be sure the battery is firmly connected to battery snap with the correct polarities.

ATTENTION:


- Turn down the volume of effect and amplifier to the minimum before connecting Maxon effects to guitar, amplifier or other effects in order not to damage other connected equipment by unintended noise.
- When not in use, disconnect plug from input jack to preserve battery.
- Take out the battery if the product is not used for a long period of time.
- No or dark LED light indicates the battery is low or not installed. In this case replace the battery to avoid poor effect or distorted signal.
- Be sure to use the correct Maxon AC adaptor. Use of any other adaptor may cause trouble.
- Do not try to remove screws.



If you want to dispose this product, do not mix with general household waste.

There is a separate collection system for used electronics products in accordance with legislation under the WEEE Directive (Directive 2002/96/EC) and is effective only within European Union.

Optional accessories:
Maxon AC adaptor

model name	input	output	polarity
AC210N	120VAC	9VDC/200mA	 center-/sleeve+
AC210U	220VAC		
AC210UK (BS1363 plug)	230VAC		
AC210AN (AS/NZS3112 plug)	240VAC		
AC210	100VAC	10VDC/200mA	

Maxon shall not be held liable to you or any third party for any losses caused by incorrect operation of this equipment, malfunction or any other failure of this equipment to operate as expected, or normal use of this equipment, except to the extent stipulated by law.

Maxon shall not be held liable to you or any third party for any losses related to concerts, exhibitions, or any other type of event due to malfunction or incorrect operation of this equipment.



NISSHIN ONPA CO., LTD.

4172-1 Shimauchi, Matsumoto-City, Nagano, 390-0851 Japan

TEL:+81-263-40-1403 FAX:+81-263-40-1410

URL : <http://www.maxon.co.jp> E-mail : sales@maxon.co.jp

For North America

URL: <http://www.maxonfx.com> E-mail: info@maxonfx.com

All specifications are subject to change for improvement without notice or obligation.
Sample setting by Shiro Tanigawa

Copyright 1999 - 2007 NISSHIN ONPA CO., LTD. All rights reserved.

UMN-9SE-0104B

Printed in Japan

取扱説明書

OD9 OVERDRIVE

SD9 SONIC DISTORTION

OD9Pro+ OVERDRIVE

CP9Pro+ COMPRESSOR/LIMITER

PT9Pro+ PHASER

◆安全上のご注意◆

機器を安全にご使用いただくため、ご使用前にこの取扱説明書を必ずお読みください。

そのあとは大切に保管し、必要になったときにお読みください。

●安全上のご注意● 必ずお守りください

機器を安全にご使用いただくため、ご使用前にこの取扱説明書を必ずお読みください。

そのあとは大切に保管し、必要になったときにお読みください。

製品を安全に正しくお使いいただくために、必ずお守りいただくことを次のように区分して説明しています。

- 表示内容を無視して誤った使い方をしたときに、生じる危害や損害の程度を次の表示で区分し説明しています。



警告

この表示欄は、「人が死亡または重傷などを負う可能性が想定される」内容を示しています。



注意

この表意欄は、「傷害を負う可能性または物的障害のみが発生する可能性が想定される」内容を示しています。

- お守りいただく内容の種類を、次の絵表示で区分し、説明しています。



.....このような絵表示は、気をつけていただきたい「注意喚起」の内容を示しています。



.....このような絵表示は、してはいけない「禁止」の内容を示しています。



.....このような絵表示は、必ず実行していただく「強制」の内容を示しています。

警告



ケースを絶対に開けないでください。

機器の裏蓋を開けて改造しないでください。

〈内部には電圧の高い部分があり、火災や感電の危険があります。〉



異常のときは機器の使用を中止してください。

煙が出たり、変な臭いや音がする場合、機器の使用を中止してください。



直ちにコンセントからACアダプターを抜いてください。点検、修理をご依頼ください。



警告



放熱にご注意



ACアダプタを布や布団等で覆ったり、包まないでください。
《熱がこもり、ケースの変形や火災の危険があります。》



注意



指定以外のACアダプタを使わない。

必ず指定のAC100ボルト用のACアダプタをご使用ください。

《指定以外のACアダプタを使用しますと火災、感電の原因になることがあります。》



電源プラグの抜き差しは正しく

ぬれた手でACアダプタを抜き差ししないでください。

《感電の危険があります。》

コンセントから抜くときは、必ずACアダプタ本体を持って抜いてください。

《コードの部分引っ張りますと、コードが傷つき、火災や感電の原因になることがあります。》



水、湿気、ほこり、高温は禁物

風呂場や屋外など水のかかる所、湿度が高い所、ほこりの多い所、温度の高いところでは保管や使用をしないでください。

《火災や感電の原因になることがあります。》



長期間使用しないときは

長期間機器を使用しないときは、安全のため、必ずACアダプタをコンセントから抜いてください。

《火災の原因になることがあります。》

OD9 Overdrive

- 初期オリジナルモデルと同じオペアンプIC JRC4558D、回路定数で入力レベルに応じてスムーズに変化するナチュラルなチューブドライブ・サウンドを作りだします。
- 電池の交換はワンタッチ式です。ドライバやコイン等を使わずに簡単に交換が可能です。
- 長時間連続使用する場合は、オプションのACアダプタを接続できるACアダプタ・ジャックが装備されています。

各部の名称と使い方

① IN (インプット・ジャック)

ギターや他のエフェクターの出力と接続します。インプット・ジャックにプラグを差し込むと、自動的に電源が入ります。使用しない時はプラグをジャックから抜いておいてください。

② OUT (アウトプット・ジャック)


出力ジャックです。アンプ又は、他のエフェクターなどの入力へ接続します。

③ DRIVE (ドライブ)

歪みの深さをコントロールします。右に回すと歪みの深さが増します。

④ TONE (トーン)

高域のトーンコントロールを行います。右に回すと高域が強調され、左に回すと高域がカットされます。

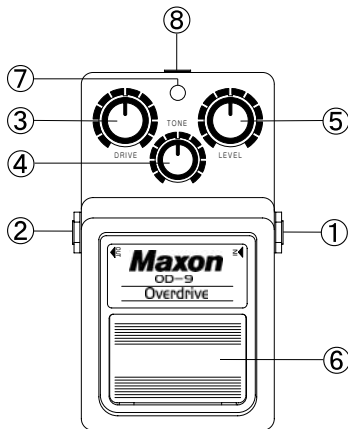

- TBS (トゥルー・バイパス・スイッチング) 採用。バイパス時に信号が電子回路を一切通らず完全なバイパス状態になり、直接つないだ時に限りなく近いバイパス信号をアンプに送ります。エフェクト／バイパス切り換えスイッチには、ローノイズのメカニカルスイッチを採用しました。
- バイパス／エフェクト&バッテリー・コンディションを兼ねたインジケータを装備、暗いステージでもミスセットの心配がありません。

⑤ LEVEL (レベル)

出力レベルをコントロールします。通常バイパスとエフェクトのレベルが1:1になるようにセットします。

⑥ フット・スイッチ

バイパス／エフェクト切り換えは“TBS”フット・スイッチの足踏み操作によって行います。踏込むたびにエフェクトとバイパス交互に切り換ります。

※エフェクトはフット・スイッチを踏込んだ時切り換りますが、バイパスはフット・スイッチを踏込んだ後、足を戻す時に切り換ります。

⑦ インジケータ

バイパス／エフェクト状態とバッテリー・コンディションの状態を表示するインジケータです。INPUTにプラグを差し込みフット・スイッチで「エフェクト」にセットすると点灯します。この時LEDが点灯しない場合は、電池が入っていないか電池が消耗(電圧低下)しています。新しい電池と交換してください。

⑧ DC IN. (外部電源ジャック)


外部電源を接続するジャックです。使用する場合は専用ACアダプタを接続してください。




電源投入時、接続されているほかの機器へのノイズによる損傷を防ぐためにアンプ等のボリュームを絞り切ってからアダプタを本体に接続してください。

SAMPLE SETTING サンプルセッティング


www.maxon.co.jpにてサウンドクリップがご試聴いただけます。




No.1 アンプ・クリーン / PU : Hum
クリーンサウンドをOD-9ならではのチューブ・ドライブ・サウンドにチェンジさせた王道とも呼べるオーバー・ドライブ・サウンド。



No.3 アンプ・ドライブ / PU : Hum, Single
コンパクト・アンプのドライブ・サウンドをスタック・タイプの迫力にパワー・アップさせるセッティング。リード用としても最適。




No.2 アンプ・クランチ / PU : Hum
アンプ側で基本となるクランチ・サウンドを作りOD-9でパワー感とサステインをプラスする。



No.4 アンプ・クリーン、クランチ / PU : Single
OD-9をゲイン・ブースター的に使うセッティング。ピッキング・ニュアンスなどギタリストの感性をナチュラルに表現してくれる。

接続図

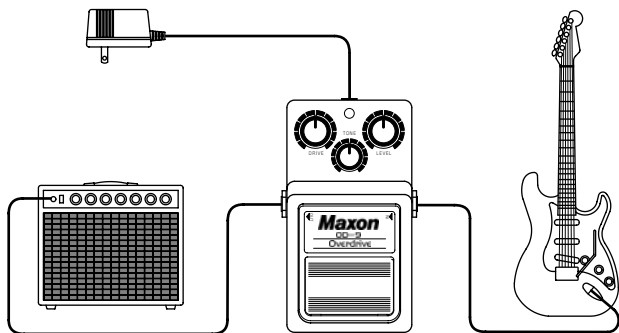

主な仕様

入力インピーダンス	: 500k Ω
出力インピーダンス	: 10k Ω
最大増幅率	: 40dB (1.5kHz)
入力換算ノイズ	: -114dB以下 (入力ショート・IHF-A)
コントロール	: DRIVE, TONE, LEVEL
スイッチ	: EFFECT/True BYPASS
電源	: 9V乾電池 (6LR61 or 6F22) 1本又はMaxon ACアダプタ
消費電流	: 6mA/9V 7mA/10V
電池寿命	: マンガン電池 76時間 25°C (Panasonic 6F22NB)
寸法	: 124 (D) \times 74 (W) \times 54 (H) mm
重量	: 580g (電池を含む)
オプション	: ACアダプタ

※規格及び外観は改良の為予告なく変更する場合があります。

SD9 Sonic Distortion

- ブライトなトーンをもった抜けの良いディストーション効果を再現。低音から高音まですべてに鋭敏なピッキング・レスポンスを発揮。美しく響く倍音は高域の輝きをプロデュースします。
- 電池の交換はワンタッチ式です。ドライバやコイン等を使わずに簡単に交換が可能です。
- 長時間連続使用する場合は、オプションのACアダプタを接続できるACアダプタ・ジャックが装備されています。

各部の名称と使い方

① IN (インプット・ジャック)

ギターや他のエフェクターの出力と接続します。インプット・ジャックにプラグを差し込むと、自動的に電源が入ります。使用しない時はプラグをジャックから抜いておいてください。

② OUT (アウトプット・ジャック)


出力ジャックです。アンプ又は、他のエフェクターなどの入力へ接続します。

③ DIST. (ディストーション)

歪みの深さをコントロールします。右に回すと歪みの深さが増します。

④ TONE (トーン)

高域のトーンコントロールを行います。右に回すと高域が強調され、左に回すと高域がカットされます。

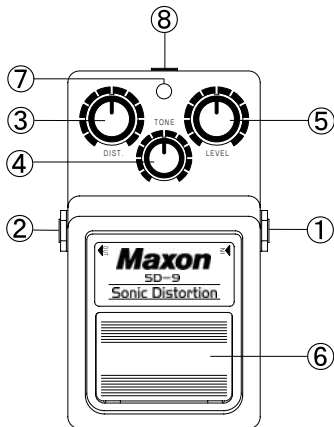

- TBS(トゥルー・バイパス・スイッチング)採用。バイパス時に信号が電子回路を一切通らず完全なバイパス状態になり、直接つないだ時に限りなく近いバイパス信号をアンプに送ります。エフェクト／バイパス切り換えスイッチには、ローノイズのメカニカルスイッチを採用しました。
- バイパス／エフェクト&バッテリー・コンディションを兼ねたインジケータを装備、暗いステージでもミスセットの心配がありません。

⑤ LEVEL (レベル)

出力レベルをコントロールします。通常バイパスとエフェクトのレベルが1:1になるようにセットします。

⑥ フット・スイッチ

バイパス／エフェクト切り換えは“TBS”フット・スイッチの足踏み操作によって行います。踏込むたびにエフェクトとバイパス交互に切り換ります。
※エフェクトはフット・スイッチを踏込んだ時切り換りますが、バイパスはフット・スイッチを踏込んだ後、足を戻す時に切り換ります。


⑦ インジケータ

バイパス／エフェクト状態とバッテリー・コンディションの状態を表示するインジケータです。INPUTにプラグを差し込みフット・スイッチで「エフェクト」にセットすると点灯します。この時LEDが点灯しない場合は、電池が入っていないか電池が消耗

(電圧低下)しています。新しい電池と交換して下さい。


⑧ DC IN. (外部電源ジャック)

外部電源を接続するジャックです。使用する場合は専用ACアダプタを接続してください。

 電源投入時、接続されているほかの機器へのノイズによる損傷を防ぐためにアンプ等のボリュームを絞ってからアダプタを本体に接続してください。


SAMPLE SETTING サンプルセッティング

www.maxon.co.jpにてサウンドクリップがご試聴いただけます。




No.1 アンプ・クリーン / PU : Hum

SD-9特有のファットな歪みをフルに感じるスムーズ&パワフル・ディスーション。アンプを歪ませすぎないのがポイント。




No.3 アンプ・ドライブ / PU : Hum

リアUP+高域をブーストさせたSD-9によるライトなFuzzディスーション・サウンド。



No.2 アンプ・クランチ / PU : Single


ドライブ・レベルを抑えたオーバー・ドライブ系サウンド。アンプ・サウンドも大切にしたいギタリストにおすすめのセッティング。



No.4 アンプ・ドライブ / Hum

アンプ側のミッドを落としドン・シャリ・サウンドにSD-9を加えて作るパワフルかつキメ細かいヘヴィー・サウンド。

接続図

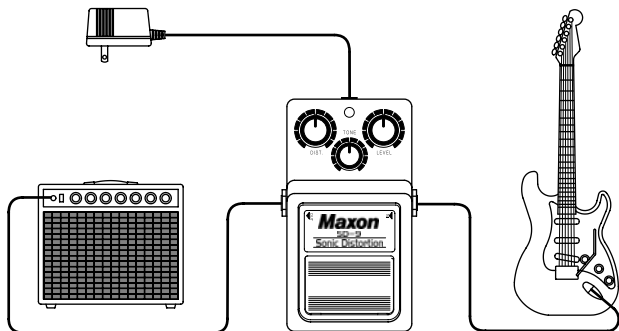

主な仕様

入力インピーダンス	: 500k Ω
出力インピーダンス	: 10k Ω
最大増幅率	: 42dB (2.0kHz)
入力換算ノイズ	: -115dB以下 (入力ショート・IHF-A)
コントロール	: DIST, TONE, LEVEL
スイッチ	: EFFECT/True BYPASS
電源	: 9V乾電池 (6LR61 or 6F22) 1本又はMaxon ACアダプタ
消費電流	: 6mA/9V 7mA/10V
電池寿命	: マンガン電池 76時間 25 $^{\circ}$ C (Panasonic 6F22NB)
寸法	: 124 (D) \times 74 (W) \times 54 (H) mm
重量	: 580g (電池を含む)
オプション	: ACアダプタ

※規格及び外観は改良の為予告なく変更する場合があります。

OD9Pro+ Overdrive

- 新たにBOOST/NORMAL切替スイッチを搭載しました。NORMALモードでは、OD9特有の太くナチュラルなオーバードライブ・サウンドを更にパワーアップしました。BOOSTモードでは、ハイ、ローを絞り、中音域をブーストさせることにより、音やせ感のない滑らかで音抜けのよいチューブ・サウンドを実現しました。
- 電源部にDC-DCコンバータ回路を搭載し、動作電圧を18V(±9V)に昇圧。内部に動作電圧切替スイッチを装備し、9V(±4.5V)でも使用可能です。安定化した動作電圧により、常に安定したサウンドが得られます。

各部の名称と使い方

①IN (インプット・ジャック)

入力ジャックです。ギターや他のエフェクタの出力と接続します。インプット・ジャックにプラグを差し込むと自動的に電源が入ります(電池動作時)。使用しない時はプラグをジャックから抜いておいてください。*ACアダプタ動作時は、インプット・ジャックにプラグ差し込まなくても、常に電源が入った状態になります。

②OUT (アウトプット・ジャック)




出力ジャックです。アンプまたは他のエフェクタなどの入力へ接続します。

③DRIVE (ドライブ)

オーバードライブ・サウンドの深さをコントロールします。右に回すとオーバードライブ・サウンドの深さが増します。左に回しきった位置では、滑らかにナチュラルなクリーン・サウンドを得ることができます。

④TONE (トーン)

高音域のトーンをコントロールします。右に回すと高音域が強調され、左に回すと高音域がカットされます。



- 4PDTメカニカル・スイッチによるTBS(True Bypass Switching)を搭載しました。バイパス時には電子回路を一切通らず完全なバイパス状態になります。
- 電池の交換はワンタッチ式です。ドライバやコイン等を使わずに簡単に交換が可能です。

⑤LEVEL (レベル)

出力レベルをコントロールします。通常バイパスとエフェクトのレベルが同じになるようにセツトします。

⑥BOOST/NORMALスイッチ (ブースト/ノーマル スイッチ)

NORMALモードでは、クラシカルなチューブ・サウンド。BOOSTモードでは、ハイ、ローを絞り、中音域をブーストさせたチューブ・サウンドになります。

⑦フット・スイッチ

バイパス/エフェクト切り換えはフット・スイッチの足踏み操作によって行います。踏込むたびにバイパスとエフェクト交互に切り換えます。

※エフェクトはフット・スイッチを踏込んだ時切り換わりませんが、バイパスはフット・スイッチを踏込んだ後、足を戻す時に切り換わります。

⑧インジケータ

バイパス/エフェクト状態とバッテリー・コンディションの状態を表示するインジケータです。INPUTにプラグを差し込みフット・スイッチで「エ

フェクト」にセツトすると点灯します。この時インジケータが点灯しない場合は、電池が入っていないか電池が消耗しています。新しい電池と交換してください。

⑨DC.Input. (外部電源ジャック)

専用ACアダプタを接続するジャックです。オプションのACアダプタを接続してください。



ACアダプタやDCプラグを抜き差しする前にアンプのボリュームを最小にしてください。

⑩動作電圧切り換えスイッチ


左側が18V(±9V)、右側が9V(±4.5V)です。スイッチを切り換える前にアンプのボリュームを最小にしてください。

⑪電圧インジケータ

動作電圧の選択状況を表示するインジケータです。スイッチ右側9V(±4.5V)時は点灯します。スイッチ左側18V(±9V)時は消灯します。

SAMPLE SETTING サンプルセッティング

www.maxon.co.jpにてサウンドクリップがご試聴いただけます。




No.1 クリーン・チューブ

アンプ・クリーン

PU:Single

OD9Pro+ NORMAL モード

クリーン・サウンドにチューブ・コンボ系の
ウォームなテイストを加えるセッティングです。




No.3 クラシック・ドライブ

アンプ・クランチ

PU:Hum

OD9Pro+ NORMAL モード

OD9Pro+のクリーミーなドライブを加え、70年代
ハード・ロックに代表される滑らかで中音域に伸び
のあるチューブ・ドライブ・サウンドを作り出します。




No.2 ブルー・ブースト

アンプ・クランチ

PU:Single

OD9Pro+ NORMAL モード

OD9Pro+特有の太く滑らかなブースト・タ
イプのオーバードライブ・サウンドです。原
音を活かしながら腰のあるリード・サウン
ドが得られます。



No.4 ファット・ドライブ


アンプ・ドライブ

PU:Hum

OD9Pro+ BOOST モード

深くファットなオーバードライブ・サウン
ドが加わったOD9Pro+ならではの滑らかさと厚
みを持ったパワフルなブースト・サウン
ドです。

接続図

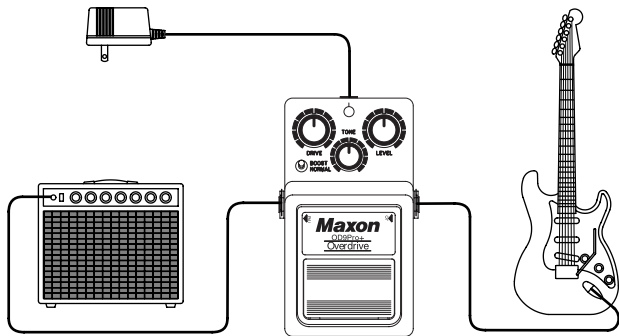

主な仕様

入力インピーダンス	:500k Ω
出力インピーダンス	:10k Ω 以下
最大増幅率	:NORMAL 43dB (1.5kHz) BOOST 46 dB (1kHz)
入力換算ノイズ	: -116 dB以下 (IHF-A)
コントロール	:DRIVE, TONE, LEVEL BOOST/NORMAL スイッチ 18V(± 9 V) /9V(± 4.5 V) スイッチ
動作電圧	:18V(± 9 V) /9V(± 4.5 V)
消費電流	:動作電圧18V(± 9 V)時 35mA /9V 32mA /10V 動作電圧9V(± 4.5 V) 時 27mA /9V 27mA /10V
寸法	:124 (D) \times 74 (W) \times 54 (H) mm
重量	:580g (電池含む)
電源	:9V電池 (6F22) 又はACアダプタ
電池寿命	:マンガン乾電池 3時間 25°C(Panasonic 6F22NB) アルカリ乾電池 8時間 25°C(Panasonic 6LR61G)

※規格及び外観は改良の為予告なく変更する場合があります

CP9Pro+ Compressor/Limiter

- 高品位VCA(電圧制御増幅器)とRMS(実効値)型センサーを採用。ローノイズでナチュラルなアタックレスポンスが得られるプロスペック・コンプレッサーです。
- 電源部にDC-DCコンバータ回路を搭載。内部電圧を18V(±9V)に昇圧することにより高ダイナミック・レンジを実現、歪みに強い十分なヘッドルームを確保します。

各部の名称と使い方

① IN(インプット・ジャック)

入力ジャックです。ギターや他のエフェクターの出力と接続します。インプット・ジャックにプラグを差し込むと自動的に電源が入ります。使用しない時はプラグをジャックから抜いてください。

② OUT(アウトプット・ジャック)


出力ジャックです。アンプまたは他のエフェクターなどの入力と接続します。

③ THRESHOLD(スレッシュホールドレベル・コントロール)

圧縮が始まるレベル位置を設定します(Fig.1)。設定したレベル位置を超えた音が入力されると、RATIOで設定した比率にしたがって音が圧縮されます(Fig.2)。右に回すほど小さな入力レベルで圧縮を開始しますが、出力レベルが小さくなりますのでGAINコントロールを上げて調整してください(Fig.3)。

④ RATIO(レシオ・コントロール)

圧縮の比率をコントロールします。右に回すほど圧縮率は高くなり∞:1でリミッターとなります。

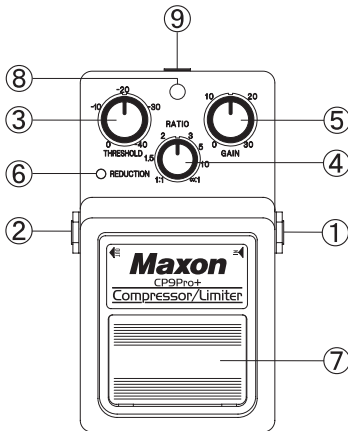

- REDUCTION(リダクション)インジケータ搭載。ピッキングのダイナミクスによってコンプレッション/リミットがかかるレベルを視覚的に確認できます。
- 4PDTスイッチによるTBS(True Bypass Switching)を採用。バイパス時に信号が電子回路を一切通らず完全なバイパス状態になります。
- 電池の交換はワンタッチ式です。ドライバやコイン等を使わずに簡単に交換が可能です。

- 1:1 の場合は圧縮されませんのでGAINを上げてクリーンブースター的に使用できます (Fig.3)。
- ⑤ **GAIN (ゲイン・コントロール)**
出力レベルをコントロールします。THRESHOLD、RATIOで圧縮を強く設定するほど出力レベルは下がりますので (図3) 通常バイパス時の音量と同じになるようGAINコントロールを上げて設定します。最大+30dBまでブーストできますので無圧縮(RATIO 1:1)時、クリーンブースター的に使用できます。
- ⑥ **REDUCTION (リダクション・インジケータ)**
圧縮インジケータです。入力レベルに対して出力レベルが+3dB以上圧縮されるとLEDが点灯します。
- ※フット・スイッチ、インジケータ、DC、IN.の説明はOD9を参考下さい。
- ⑦フット・スイッチ
⑧インジケータ
⑨DC、IN.

Fig.1 THRESHOLD




Fig.2 RATIO






Fig.3 GAIN




SAMPLE SETTING サンプルセッティング

www.maxon.co.jp にてサウンドクリップがご試聴いただけます。




No.1 ディープ・コンプ

RATIOを高くセットした深いコンプレッション独特のサウンドを作り出すセッティング。深いコンプでも原音の持つニュアンスを崩さないCP9Pro+ならではのサウンド。




No.3 フィンガー・ベース

ベースのフィンガー・ピッキングのツブを揃えるリミッター的なセッティング。(THRESHOLD/GAINはベースの出力に合わせセットします)。



No.2 カッティング


クリーン系カッティングのツブを揃えサウンドにまとまりを与えるセッティング。THRESHOLDのレベル設定によって原音のアタック感とのバランスを取る。



No.4 スラップ・ベース

ピーク成分の多いスラップ・フレーズへのコンプ・サウンド。コンプレッションを深めにセッティングしアタックとレベルを揃えている。(THRESHOLD/GAINはベースの出力に合わせセットします)。

接続図

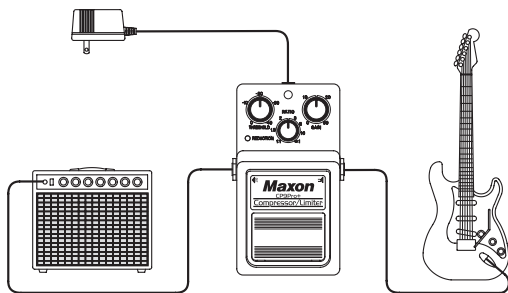

主な仕様

入力インピーダンス	: 500kΩ
出力インピーダンス	: 10kΩ
最大出力レベル	: +18dBu(1kHz)
コントロール THRESHOLD	: 0dBu ~ -40dBu
RATIO	: 1:1 ~ ∞:1
GAIN	: 0dB ~ +30dB
歪率	: 0.01% (1kHz) 0dB出力時
残留ノイズ	: -95dBu入力ショートIHF-A
表示	: バイパス/エフェクトLED REDUCTION LED 点灯時3dB以上圧縮
回路電源	: ±9V(DC-DC Converter)
電源	: 6F22 9Vマンガン電池1本又はACアダプタ
消費電流	: 25mA/9V 23mA/10V
寸法	: 124(D)×74(W)×54(H)
重量	: 580g(電池含む)
電池寿命	: マンガン乾電池 5.1時間 25°C (Panasonic 6F22NB) アルカリ乾電池 12.4時間 25°C (Panasonic 6LR61G)

※規格及び外観は改良の為予告なく変更する場合があります

PT9Pro+ Phaser

- 高性能フォトセル素子を使用、10段フェイズ・シフト回路によるローノイズで滑らかなフェイズ・サウンドが得られるプロスペック・フェイザーです。
- 電源部にDC-DCコンバータ回路を搭載。内部電圧を18V(±9V)に昇圧することにより高ダイナミック・レンジを実現、歪みに強い十分なヘッドルームを確保します。

各部の名称と使い方

① IN (インプット・ジャック)

入力ジャックです。ギターや他のエフェクターの出力と接続します。インプット・ジャックにプラグを差し込むと、自動的に電源が入ります。使用しない時はプラグをジャックから抜いておいてください。

② OUT (アウトプット・ジャック)


出力ジャックです。アンプまたは他のエフェクターなどの入力と接続します。

③ SPEED (スピード・コントロール)

モジュレーション(うねり)の速さをコントロールします。右に回すほどモジュレーションが早くなります。

④ FEEDBACK (フィードバック・コントロール)

モジュレーションのかかりの強さをコントロールします。右に回すほどフィードバック量が多くなり、アクの強い効果になります。右いっぱいに戻しきった位置で自己発振しますが、この現象はFEEDBACKコントロールを下げることにより止まり製品の異常ではありません。左いっぱいに戻しきった位置でフィードバック・レベルは“0”となります。

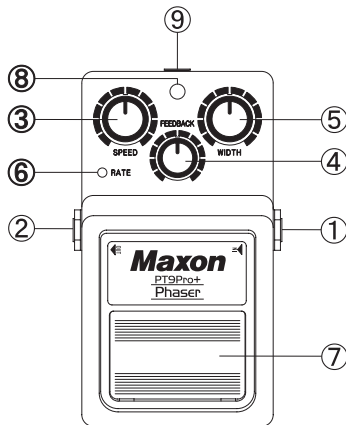

- **RATE(レート)インジケータ搭載。**フェイズ・スピードにシンクロして徐々にLEDが点滅し、視覚的にスピードを確認できます。
- **4PDTスイッチによるTBS(True Bypass Switching)**を採用。バイパス時に信号が電子回路を一切通らず完全なバイパス状態になります。
- **電池の交換はワンタッチ式です。**ドライバやコイン等を使わずに簡単に交換が可能です。

まり製品の異常ではありません。左いっぱいに回しきった位置でフィードバック・レベルは“0”となります。

- ⑤ **WIDTH(ウイドウス・コントロール)**
モジュレーションの深さをコントロールします。右に回すほど効果が深くなります。
- ⑥ **RATE(レートインジケータ)**
フェイズ・シフト・スピード(RATE)を表示するインジケータです。SPEEDで設定した速さにシンクロして徐々にLEDが点滅します。
- ⑦ **フット・スイッチ**
バイパス/エフェクト切り換えは「TBS」フット・スイッチの足踏み操作によって行います。踏込むたびにエフェクトとバイパス交互に切り換えます。
※エフェクトはフット・スイッチを踏込んだ時切り換わりますが、バイパスはフット・スイッチを踏込んだ後、足を戻す時に切り換わります。

⑧ インジケータ


バイパス/エフェクト状態とバッテリー・コンディションの状態を表示するインジケータです。INPUTにプラグを差し込みフット・スイッチで「エフェクト」にセットすると点灯します。この時LEDが点灯しない場合は、電池が入っていないか電池が消耗(電圧低下)しています。新しい電池と交換してください。

⑨ DC.IN.

外部電源を接続するジャックです。使用する場合は、専用ACアダプタを接続してください。電源投入時、接続されているほかの機器へのノイズによる損傷を防ぐためにアンプ等のボリュームを絞り切ってからアダプタを本体に接続してください。


SAMPLE SETTING サンプルセッティング

www.maxon.co.jpにてサウンドクリップがご試聴いただけます。




No.1 スムーズ&ウォーム

ミディアム・スピードによるスタンダードなセッティング。音ヤセ感とクセのないアナログ・フェイズ特有のウォームなトーンが印象的。




No.3 ベース

PT9Pro+はベースにもベストマッチ。ベースの低音感を損なうことなくゆったりとしたウネリを加えます。WIDTHレベルで広がり感をコントロールする。



No.2 トレモロ


広がりを持ちながらもコーラス・エフェクトによるトレモロとは一味違った存在感のあるトレモロ・サウンド。WIDTHでウネリのキャラクターをコントロールするとよい。



No.4 フィードバック

PT9Pro+ならではのスペシャル・サウンド。フィードバック・レベルをフルにセットしながらWIDTHとSPEEDを変化させて作るフェイズシフターによる飛び道具のサウンド。

接続図

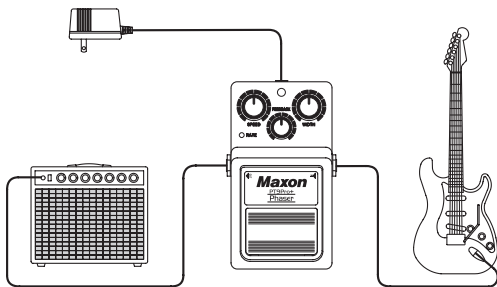


主な仕様

入力インピーダンス	: 500k Ω
出力インピーダンス	: 10k Ω
最大入力レベル	: +18dBu(1kHz)
コントロール	: SPEED FEEDBACK WIDTH
スピード周波数	: 0.055~8.3Hz (18Sec — 120mSec)
表示	: バイパス/エフェクトLED RATE LED
残留ノイズ	: -95dBu入力ショートIHF-A
回路電源	: \pm 9V(DC-DC Converter)
電源	: 6F22 9Vマンガン電池1本又はACアダプタ
消費電流	: 32mA/9V 30mA/10V
寸法	: 124(D) \times 74(W) \times 54(H)
重量	: 580g(電池含む)
電池寿命	: マンガン乾電池 3.0時間 25 $^{\circ}$ C (Panasonic 6F22NB) アルカリ乾電池 8.4時間 25 $^{\circ}$ C (Panasonic 6LR61G)

※規格及び外観は改良の為予告なく変更する場合があります

電池交換

- この製品は6F22, 6LR61 9Vマンガン乾電池を1本使用しています。
- 電池の交換は図の順序に従ってください。

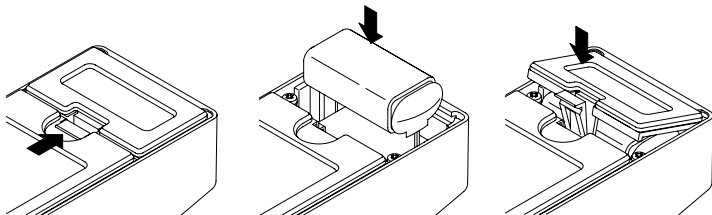

※電池の交換はバッテリー・スナップと電池の接続が確実であること、電池の極性に注意してください。
※使用済み乾電池は、住んでいる所(各自治体)によって「ゴミの捨て方」が違います。住んでいる市町村の指示にしたがって捨ててください。

取扱上の注意

- ギター、エフェクター、アンプ等へのプラグ接続は、接続されるほかの機器へのノイズによる損傷を防ぐためにエフェクタ、アンプ等のボリュームを絞ってしてから接続してください。
- 電池を長持ちさせるため、使用しない時はインプット・ジャックからプラグを抜いてください。
- 長時間使用しない時は、電池を抜きとってください。
- LEDが暗くなったり点灯しない時は電池の電圧低下を意味します。このような場合効果が弱くなったり音が歪んだりしますので早めに電池を交換してください。
- ACアダプタは必ずマクソン製品をお使いください。指定外のものをご使用になるとトラブルの原因になります。
- 操作上必要なもの以外の止めネジ類には触れないでください。

お客様または第三者が、この製品の誤った取り扱い、故障、その他の不具合、またはこの製品の使用によって受けられた損害については、法令上の賠償責任が認められる場合を除き、当社は一切その責任を負いません。あらかじめご了承ください。

本製品の故障、誤動作または不具合による、コンサートやイベントなどにかかわる損害、及びお客様または第三者が製品利用の機会を逸したために発生した損害など、付随的損害の補償については、当社は一切責任を負いません。あらかじめご了承ください。

株式会社 日伸音波製作所

〒390-0851 松本市島内4172-1

TEL : 0263-40-1403 FAX : 0263-40-1410

URL : <http://www.maxon.co.jp> E-mail : sales@maxon.co.jp

製品仕様及び製品外観などは、改良のため予告なく変更することがあります。



NISSHIN ONPA CO., LTD.

4172-1 Shimauchi, Matsumoto-City, Nagano, 390-0851 Japan

TEL:+81-263-40-1403 FAX:+81-263-40-1410

URL : <http://www.maxon.co.jp> E-mail : sales@maxon.co.jp

All specifications are subject to change for improvement without notice or obligation.
Sample setting by Shiro Tanigawa

UMN-9SE-0104B Copyright ©1999 - 2007 NISSHIN ONPA CO.,LTD. All rights reserved.
May 2007 Printed in Japan

